


TUBE ROLLER

TILTING ROLLER FOR TUBES AND BOTTLES




R3010


- + Gentle rolling motion
- + Smooth +/- 5° tilt action
- + For tubes/bottles from 8mm to 200mm diameter

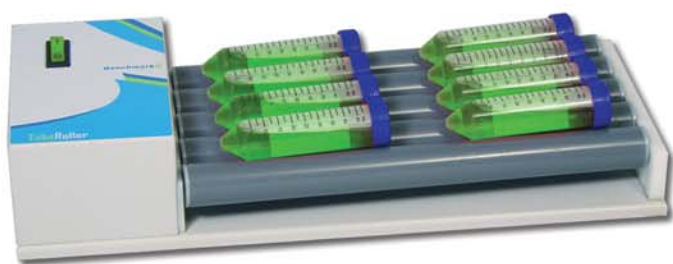

R3005



R3005 shown with Vacutainers™



R3005 shown with 15ml conical tubes

Benchmark TubeRollers are designed for the gentle, thorough mixing of a variety of containers, including Vacutainers™, bottles, test tubes, centrifuge tubes and roller bottles. Both models (5 roller and 10 roller) operate at a constant 38rpm, chosen as the optimum speed for the broadest range of mixing requirements.

As the roller mechanism rotates through each complete revolution, the right side of each roller is gently elevated about 0.5 in (13mm) and returns to the horizontal starting position. This additional, gentle up/down motion provides a "wave" effect and guarantees that the entire sample is subjected to complete, thorough mixing, end to end. This built in tilt feature provides a level of homogeneous mixing uniformity that can not be matched by any stationary roller apparatus.

From blood collection tubes to roller bottles, Benchmark TubeRollers are the ideal choice for research, clinical laboratories and doctors' offices.

Typical Sample Load Capacity:

Vessel	R3005	R3010
12 x 75mm tubes	12	26
16 x 100mm tubes	8	18
16 x 125mm tubes	8	18
15ml screw cap tubes	8	18
50ml screw cap tubes	8	18
850cm ² roller bottles	1	2

Technical Data

Speed: Fixed, 38 rpm (+/-10%)
 Motion: Simultaneous roll & tilt (+/- 5°)
 Operating Temp: +4° to 40°C (external ambient temp.)

	R3005	R3010
Number of Rollers:	5	10
Dimensions (cm):	45 x 18 x 9	45 x 36 x 9
Dimensions (in)	18 x 7 x 3.5	18 x 14 x 3.5
Weight:	5kg / 11 lbs	8kg / 17.6 lbs

Individual Roller Dims.: 3 x 32 cm (1.2 x 12.5 in)
 Vessels Accepted: 8mm to 200mm diameter
 Roller Spacing: 5mm; rollers are on 35mm centers
 Electrical: 120V, 60Hz or 230V, 50-60Hz
 Warranty: 2 years

Ordering Information

R3005* TubeRoller with 5 rollers, 115V
R3010* TubeRoller with 10 rollers, 115V

* 115V with US plug. For 230V (EU plug), please add (-E)



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.