

Clifton Unstirred Water Baths



Clifton analogue and digital unstirred water baths are designed for education and general laboratory use. They are economically priced without compromising quality.


Comprising of a high quality corrosion resistant stainless steel tank, with a bright clean finish housed in a durable painted outer case. Painted surfaces feature anti-bacterial finish with good chemical resistance.



The heaters and temperature sensors are concealed under the tank providing a clutter free working area which makes it easy to wipe and clean.

Analogue Unstirred Water Baths

Digital Unstirred Water Baths

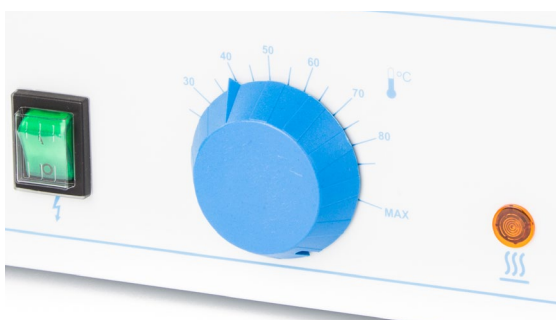

Easy to use analogue dial pointer for setting temperature, graduated in 5°C increments.



Digital water baths have push buttons for setting values. Temperatures can be easily and rapidly set with the push button, wipe clean control panel, featuring a bold LED display.

NE1 Series Unstirred Thermostatic Water Baths



The **NE1 series**, Thermostatic Clifton analogue baths are designed for general use and are economically priced without compromising quality.

Comprising of a high quality corrosion resistant stainless steel tank, with a bright clean finish housed in a durable painted outer case. Painted surfaces feature anti-bacterial finish with good chemical resistance.

Heaters and temperature sensors are concealed under the tank providing a clutter free working area which is easy to wipe clean.

	NE1-2.5	NE1-4	NE1-8	NE1-14
GENERAL				
Temp. Range	Ambient + 5°C - 100°C			
Temp. Control	Analogue Dial Pointer			
Sensitivity/Uniformity	±0.5°C / ±0.5°C	±0.25°C / ±0.1°C		
Heater Power (220-240V)	250W	400W	800W	1000W
Voltage	230V 50-60Hz	120V or 230V models available 50-60Hz		
DIMENSIONS				
Tank Capacity	2.5 Litre	4 Litre	8 Litre	14 Litre
External (mm)	270w x 190d x 240h	332w x 185d x 290h	332w x 270d x 290h	361w x 332d x 290h
Internal (mm)	230w x 130d x 150h	300w x 150d x 150h	300w x 240d x 150h	325w x 300d x 150h
Water Level Max. (mm)	130			
Water Level Min. (mm)	55			

	NE1-22	NE1-28	NE1-56
GENERAL			
Temp. Range	Ambient + 5°C - 100°C		
Temp. Control	Analogue Dial Pointer		
Sensitivity/Uniformity	±0.25°C / ±0.1°C		
Heater Power (220-240V)	1500W		2500W
Drain (12mm Bore)	Drain Outlet		Drain Tap Fitted
Voltage	120V or 230V models available 50-60Hz		
DIMENSIONS			
Tank Capacity	22 Litre	28 Litre	56 Litre
External (mm)	538w x 332d x 290h	538w x 332d x 290h	660w x 540d x 290h
Internal (mm)	500w x 300d x 150h	500w x 300d x 200h	620w x 500d x 200h
Water Level Max. (mm)	130	180	
Water Level Min. (mm)	55		

Accessories on Page 14-17



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.