

Sparkfree Refrigerators


ATEX Certified



Haier Biomedical's range of ATEX II C-T6 Explosion Proof certified laboratory refrigerators.



360° Explosion Proof Interior
with ATEX II C-T6
EU Explosion Proof
Certification.



Setting Temperature Range +3°C to +16°C
with precise control, keeps internal temperature variation within 3°C for excellent temperature uniformity.



Clear and Complete Alarm System with One Key Search
multiple alarms and data function which allows users to check and save historical data, which is useful and convenient for laboratory inspection processes.

Safer by Design

The new sparkfree laboratory refrigerator, developed in-house, offers 360° internal explosion protection and is fully compliant and certified to the ATEX II C-T6 EU standard. This is one of the highest ATEX rated refrigerators available to life science customers, requiring a safety barrier to protect the temperature sensor. Utilising a zener barrier, the new sparkfree laboratory refrigerators use a current limiting

resistance or voltage limiting diode. This limits the input of electrical energy to ensure that the sensor will not be a source of ignition for flammable and explosive substances in the cabinet. This is different from other sparkfree refrigerators, ensuring that the Haier Biomedical units are safer by design. This means that these appliances can be used in zone 2 environments.



ATEX II C-T6 EU Explosion Proof Certified

Our 360° all-around explosion proof system uses an antistatic liner, gasket and explosion proof fan motor. It is also equipped with an overcurrent and overvoltage protection system. All components within the unit are earthed to ensure static is discharged safely.



Safe and Secure

Refrigerator doors have a built-in lock and are also equipped with an adapter kit to allow user to add a padlock. The control panel is lockable to prevent anyone turning off the unit by mistake or adjusting the temperature by accident.



Multiple Alarms

The refrigerator comes with hi/low temperature alert, door open alarm, sensor error and optional power failure alarm. Optional remote alarm contacts ensure the unit can be monitored remotely and will rapidly alert users when in an alarm state.



Low Noise Design

Designed to keep noise to a minimum, the refrigerators have a noise level of below 40dB, creating a quieter working environment.



Energy Efficient Design

The hydrocarbon cooling system doubles the cooling efficiency and reduces energy costs by 50% when compared to traditional refrigerants. In addition, the cabinet is fitted with an energy saving explosion proof fan.



Flexible Configuration

Adjustable, toughened glass shelves with 40kg capacity allow user to store different sizes of reagents.

PRODUCT ADVANTAGES



Cabinet Structure



Glass Shelves




ATEX Certification Label




Explosion Proof Cabinet/Fan

ATEX Certification

Haier Biomedical sparkfree refrigerators are ATEX certified in the application range II 3G Ex nA II T6. This means that the appliances can be found in the whole 2 zone environment (including II A, II B and II C), making our range one of the safest laboratory grade refrigerators available, helping to lower costly insurance premiums.

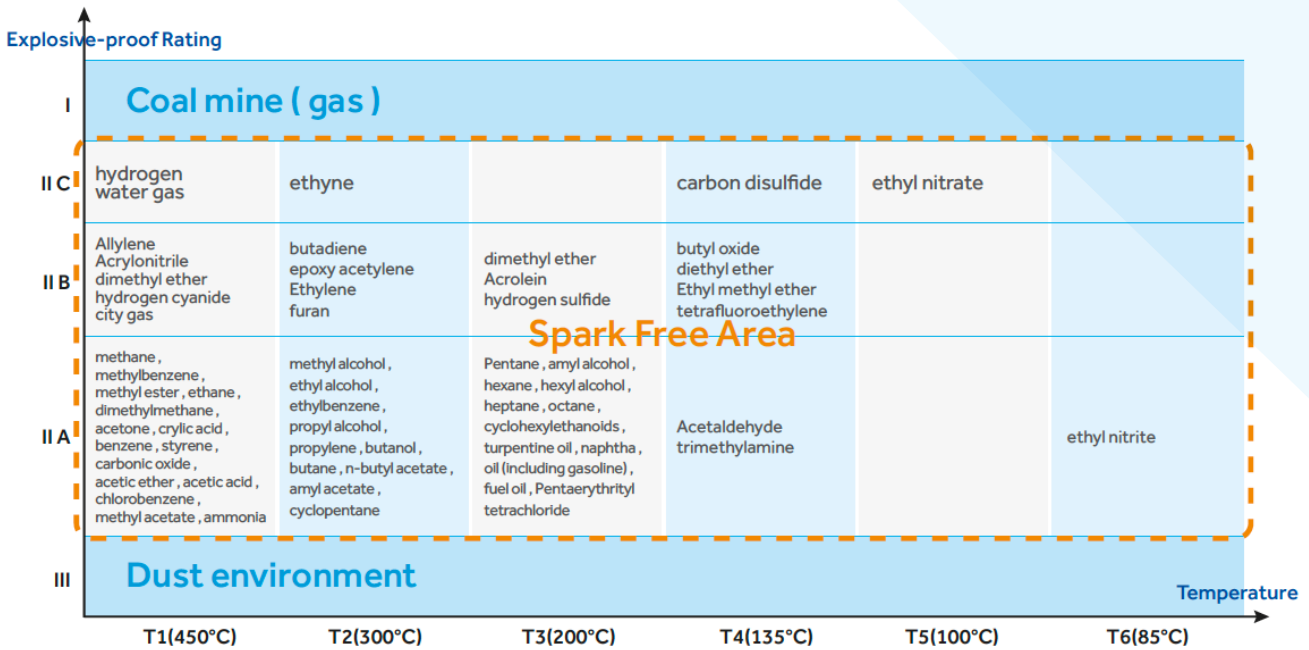

PRODUCT DIMENSION DRAWING

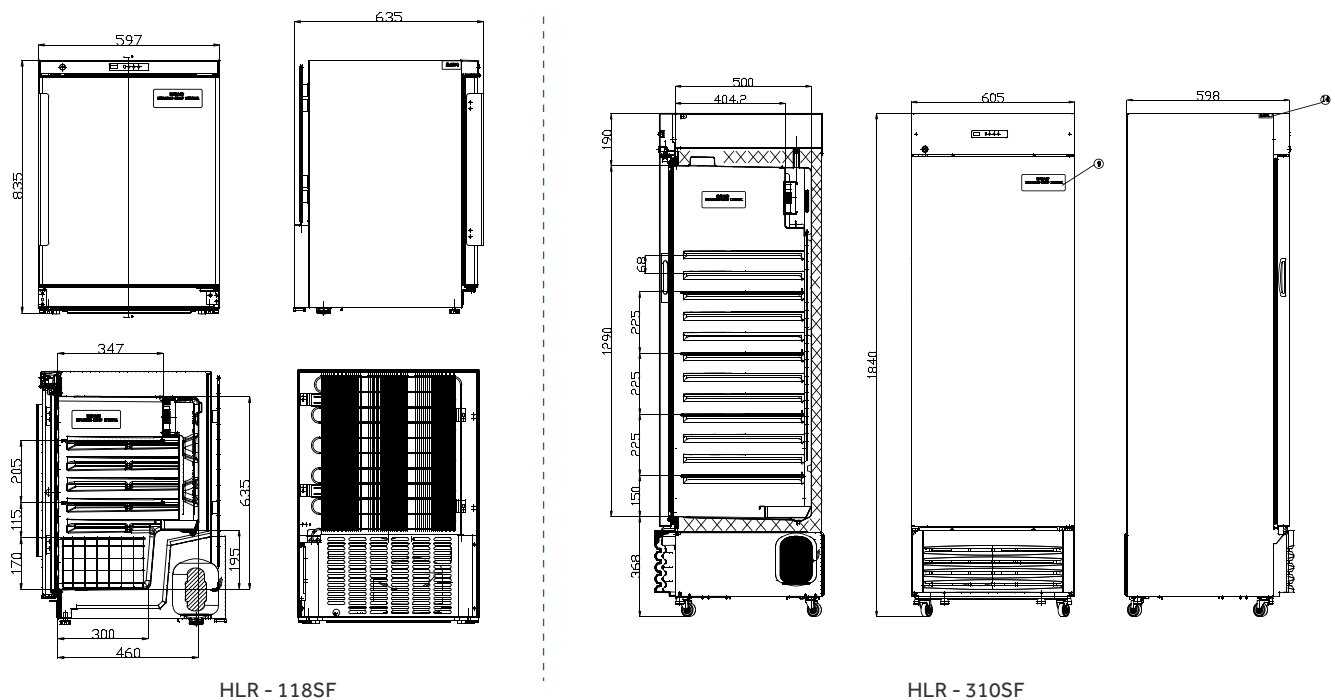

PRODUCT SPECIFICATIONS

Model		HLR-118SF	HLR-310SF	
Parameters				
Technical Data	Type	Under-Counter	Upright	
	Climate Class	N, ST	N, ST	
	Cooling Type	Forced Air Cooling	Forced Air Cooling	
	Defrost Mode	Auto	Auto	
	Refrigerant	R134a	R600a	
Performance	Noise(dB(A))	38	40	
	Temperature Range(°C)	3~16°C Adjustable	3~16°C Adjustable	
Control	Ambient Temperature(°C)	16~38°C	16~38°C	
	Controller	Microprocessor	Microprocessor	
Electrical Data	Display	LED	LED	
	Power Supply(W/HZ)	220/50	220/50	
	Power(W)	140	210	
	Electrical Current(A)	1.03	1.26	
Dimension	Capacity(L/Cu.Ft)	118/4.2	310/10.9	
	Net/Gross Weight(approx)	(kg)	44/49	72/83
		(lbs)	97/108	158.7/183
	Interior Dimension(W*D*H)	(mm)	515×415×630	560×500×1290
		(in)	20.3×16.3×24.8	22.0×19.7×50.8
	Exterior Dimension(W*D*H)	(mm)	597×635×835	605×598×1840
		(in)	23.5×25×32.9	23.8×23.6×73.6
	Packing Dimension(W*D*H)	(mm)	608×690×910	660×670×2020
(in)		26.8×27.2×35.8	26×26.4×79.5	
Functions	Container Load(20'/40'/40'H)	48/102/102	27/57/57	
	High/Low Temperature	Y	Y	
	Power Failure	Optional	Optional	
	Sensor Error	Y	Y	
	Door Ajar	Y	Y	
Accessories	Remote Alarm	Optional	Optional	
	Caster	2	4	
	Foot	2	2	
	Shelves/Baskets	2/1	4/0	
	Water tray	1	1	
	Padlock Adapter Kit/Quantity	/	1	
Others	Built-in Key Door Lock/Quantity	2	2	
Certificate		CE ATEX	CE ATEX	
Temperature Setting Mode		Password Protection	Password Protection	
Temperature Sensor		1 Resistance Thermometer	1 Resistance Thermometer	
Power Consumption (kWh/24h)		0.7	0.8	
Material				
Exterior Material		Sprayed Cold Plate	Sprayed Cold Plate	
Interior Material/Colour		PS Plate/White	PS Plate/White	
Insulation		Cyclopentane/Isopentane	Cyclopentane/Isopentane	
Outside Door/Quantity		Foaming Door/1	Foaming Door/1	
Outside Door Sealing Structure		Sealing Strip	Sealing Strip	
Shelves Material/Quantity		Tempered Glass/2	Tempered Glass/4	
Adjustable Shelves		Y	Y	
Function Parameters				
Alarm System		Y	Y	
Boot Delay Protection		Y	Y	
Display Screen Password Protection		Y	Y	
Compressor				
Compressor Type		Fully Closed	Fully Closed	
Brand		Secop	Donper	
Compressor Power(W)		172	138	
Compressor Quantity		1	1	
Condenser				
Type(Forced Cooling)		Back Condenser	Wire and Tube Forced Condenser	
Material(Forced Cooling)		Steel Tube	Steel Tube	
Outside Fan		No	EBM	
Internal Temperature Uniformity		±3	±3	
Internal Temperature Accuracy		1	1	





WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.