


OF302-4B (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400	3x440		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60		
	kW	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44		
Displacement	l/min	108	138	138	108	138	108	138	108	138		
	CFM	3.81	4.87	4.87	3.81	4.87	3.81	4.87	3.81	4.87		
FAD @ 8 bar	l/min	38	44	44	38	44	38	44	38	44		
	CFM	1.34	1.55	1.55	1.34	1.55	1.34	1.55	1.34	1.55		
Max. pressure	bar	8	8	8	8	8	8 ¹⁾	8 ¹⁾	8	8		
	psi	120	120	120	120	120	120 ¹⁾	120 ¹⁾	120	120		
Max. current	A	7.5	8.7	6.6	4.1	4.6	3.4	4.1	1.4	1.4		
Tank size	litres	4	4	4	4	4	4	4	4	4		
	gallon	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1		
Weight	kg	22	22	22	22	22	22	22	22	22		
	lbs	49	49	49	49	49	49	49	49	49		
Noise level	dB(A)/1m	65	66	66	65	66	65	66	65	66		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

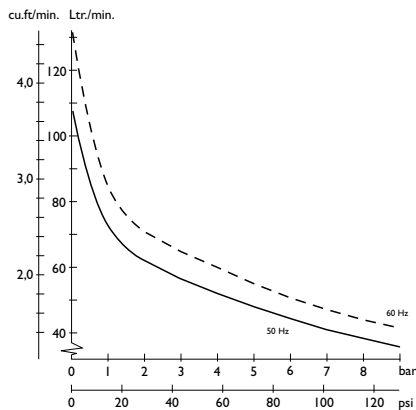

Dimensions (l x w x h)
382 x 312 x 334 mm / 15 x 12²/₈ x 13¹/₈ inch

¹⁾ Available for operation at a maximum pressure of 10 bar / 145 psi upon request. Please note that operation at higher pressure will influence the lifetime.

Technical modifications reserved

JUN-AIR®





Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

