


I 8-40 (oil-lubricated)

Voltage	V	120	200	200	230	230							
Frequency	Hz	60	50	60	50	60							
Motor	HP	1.62	1.38	1.38	1.38	1.38							
	kW	1.20	1.01	1.01	1.01	1.01							
Displacement	l/min	180	150	180	150	180							
	CFM	6.36	5.30	6.36	5.30	6.36							
FAD @ 8 bar	l/min	111	96	111	96	111							
	CFM	3.92	3.39	3.92	3.39	3.92							
Max. pressure ¹⁾	bar	8	8	8	8	8							
	psi	120	120	120	120	120							
Max. current	A	18.6	8.7	8.7	8.7	8.7							
Tank size	litres	40	40	40	40	40							
	gallon	10.6	10.6	10.6	10.6	10.6							
Weight	kg	62	62	62	62	62							
	lbs	137	137	137	137	137							
Noise level	dB(A)/1m	50	50	50	50	50							
Thermal protection		Yes	Yes	Yes	Yes	Yes							
Duty cycle		50%	50%	50%	50%	50%							

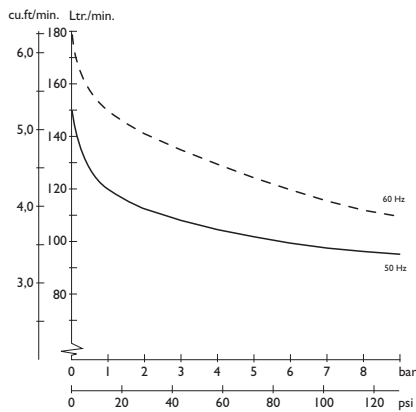

Dimensions (l x w x h)
420 x 540 x 585 mm / 16 1/8 x 21 1/8 x 23 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved



JUN-AIR®



Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

