

ROTARY MIXERS

RM Series

The Clifton® range of tube rotators are available as fixed or variable speed models with a broad range of optional accessory heads available for mixing micro tubes, tubes or flasks.


The angle of mixing is fully adjustable and suitable for continuous or intermittent mixing.

Benchtop or wall mountable, saving space.

Can be used inside Laboratory Incubators up to 60°C or in cold rooms at a minimum of 4°C.

Features Include:

- * Angle of mixing head fully adjustable from vertical to horizontal
- * The range of accessories can also be autoclaved and allow for easy loading and tube removal



Cat. No	RM-1	RM-2
Speed	30rpm	Variable 5-30rpm
Overall, dims	210w x 250d x 200h mm	210w x 250d x 200h mm
Voltage	230V	230V

1. Rotary Mixer image is shown with a selection accessory mixing discs.


2. Painted body features Anti-bacterial protection, hygienic coating which actively inhibits bacterial growth.

ACCESSORIES

for RM series

Tube mixing, End to End

Cat. No.	Description
RMD006	Disc complete with 6 clips for tube diameters 27-30mm
RMD012	Disc complete with 12 clips for tube diameters 15-17mm
RMD024	Disc complete with 24 clips for tube diameters 8-11mm

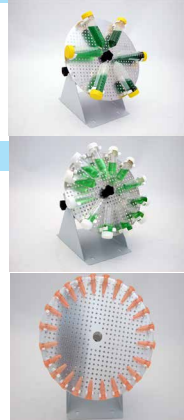

Carousel, Tube mixing, End to End

RMD024-3	3 tier disc assembly complete with 24 clips for each disc - tube diameters 8-11mm
RMD012-3	3 tier disc assembly complete with 12 clips for each disc - tube diameters 15-17mm

Carousel, Tumbling Mixing

RMD016	Carousel for tubes up to 16mm diameter
RMD025	Carousel for tubes up to 25mm diameter



Flask Mixing

RMD-1	Rotary mixer disc
FC0025	25ml flask clip
FC0050	50ml flask clip
FC0100	100ml flask clip
FC0250	250ml flask clip





Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

