



MCO-170AIC-PE

## IncuSafe

CO<sub>2</sub> Incubators

165 L



### Optimising cell culture outcomes and reproducibility

IncuSafe CO<sub>2</sub> Incubators provide precise control of CO<sub>2</sub> concentration and accurate, uniform, and highly responsive temperature control within the chamber. During cell culturing the inCu-saFe germicidal interior and SafeCell UV lamp work continuously to prevent contamination.

#### Precise & Regulated Environment


InCu-saFe and SafeCell UV both function to prevent contamination. The Direct Heat and Air Jacket System regulates the temperature whilst the Dual IR sensor controls the CO<sub>2</sub> level.

#### Time-Saving Decontamination

The high-speed decontamination system uses vaporised hydrogen peroxide and UV light. It cleans the chamber of the incubator safely in less than three hours, achieving a minimal 6 log reduction of major contaminants.

#### Ease of Use & Maintenance

A full colour LCD touch-screen allows full control even with gloved hands. Transfer of data is easy via a USB port. The easy-to-clean incubator interior features fully rounded corners and integrated shelf supports.

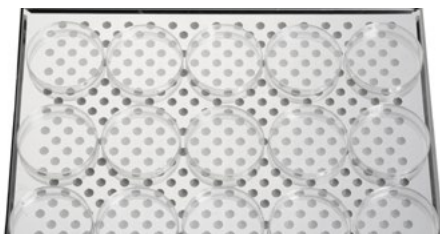

#### Optimum Cell Growth

Outstanding quality and performance for successful cell growth, optimal results and reproducibility. Perfect fit for the strictest and most sensitive protocols.



#### Efficient Workflows

Complete laboratory procedures and experiments more efficiently with less incubator downtime. Ideal for commercial applications.



#### Intuitive Usability

Control and visibility of the internal conditions, such as CO<sub>2</sub> level and temperature, is easy with the MCO-170AIC CO<sub>2</sub> incubator.

# IncuSafe CO<sub>2</sub> Incubators



## Direct Heat and Air Jacket System

Achieves accurate, uniform, and highly responsive temperature control within the chamber, providing exceptional uniformity and rapid recovery after door-openings.

## Dual IR CO<sub>2</sub> Sensor

The incubator's Dual IR sensor and P.I.D control enables ultra-fast CO<sub>2</sub> recovery without overshoot, even following multiple door-openings.


## Active Background Decontamination

The exclusive inCu-saFe copper-enriched stainless steel alloy interior offers the germicidal properties of copper and the durability of stainless steel.

The optional, isolated, SafeCell UV lamp decontaminates circulating air and water in the humidifying pan, without harming cultured cells.

## Condensation Management

With a unique antibacterial coating, the 'dew stick'—controlled by Peltier technology—condenses water on its surface, which then drips into the humidifying pan, preventing unwanted condensation in the chamber and possible contamination.

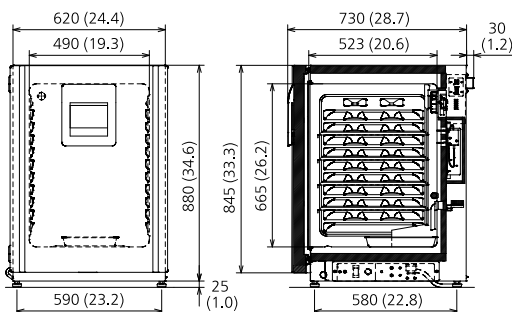

The MCO-170AIC series is certified as a Class IIa Medical Device (93/42/EEC and 2007/47/EC) for medical purposes of culturing cells, tissues, organs and embryos.



PHC Europe B.V.

Model Number	MCO-170AIC-PE	MCO-170AICUV-PE	MCO-170AICUVH-PE
External Dimensions (W x D x H) <sup>1)</sup>	mm	620 x 730 x 905	
Internal Dimensions (W x D x H)	mm	490 x 523 x 665	
Volume	liters	165	
Net Weight	kg	80	
<b>Performance</b>			
Temperature Control Range & Fluctuation	°C	AT +5 - +50, ±0.1	
Temperature Uniformity <sup>2)</sup>	°C	±0.25	
CO <sub>2</sub> Control Range & Fluctuation	%	0 - 20, ±0.15	
Humidity Level & Fluctuation	%RH	95, ±5	
Sterilisation Method		H <sub>2</sub> O <sub>2</sub> Decontamination	
<b>Control</b>			
Temperature Sensor		Thermistor	
CO <sub>2</sub> Sensor		Dual IR	
Display		LCD Touch Screen	
<b>Construction</b>			
Exterior Material		Painted Steel (rear cover not painted)	
Interior Material		Stainless Steel Copper-Enriched Alloy	
Insulation Material		Extruded polystyrene	
Heating Method		Direct Heat & Air Jacket System	
Outer Door	qty	1	
Outer Door Lock		Optional	Optional    Standard
Field Reversible Door		Included	
Inner Door	qty	1 gastight - made of tempered glass	
Shelves	qty	4 x Stainless Steel Copper-enriched Alloy	
Shelf Dimensions (W x D x H)	mm	470 x 450 x 12	
Max. Load per Shelf	kg	7	
Max. Shelf Capacity	qty	10	
Access Port	qty	1	
Access Port Position		Rear Upper Left	
Access Port Diameter	∅ mm	30	
<b>Alarms</b> (R = Remote Alarm, V = Visual Alarm, B = Buzzer Alarm)			
Power Failure		R	
Out of Temperature Setting		V-B-R	
High Temperature		V-B-R	
Out of CO <sub>2</sub> Setting		V-B-R	
Door open		V-B	
<b>Electrical and Noise Level</b>			
Power Supply	V	230	
Frequency	Hz	50	
Noise Level <sup>3)</sup>	dB	29	
<b>Options</b>			
SafeCell UV <sup>®</sup> System		MCO-170UVS-PE <sup>4)</sup>	Standard
H <sub>2</sub> O <sub>2</sub> Decontamination Board		MCO-170HB-PE <sup>4)</sup>	Standard
Electric Door Lock with Password		MCO-170EL-PW <sup>4)</sup>	Standard
H <sub>2</sub> O <sub>2</sub> Vapor Generator		MCO-HP-PW <sup>4)</sup>	
H <sub>2</sub> O <sub>2</sub> Reagent, pack of 6 bottles		MCO-H202-PE	
Multiple Inner Doors		MCO-170ID-PW	
CO <sub>2</sub> Gas Pressure Regulator		MCO-100L-PW	
Automatic CO <sub>2</sub> Cylinder Changeover System		MCO-21GC-PW	
Semi-automatic one point Gas Calibration Kit		MCO-SG-PW	
InCu-saFe <sup>®</sup> Shelf		MCO-170ST-PW	
InCu-saFe <sup>®</sup> Half Tray System		MCO-25ST-PW	
Double Stacking Bracket*		MCO-170PS-PW	
Stacking Plate*		MCO-170SB-PW	
Roller Base		MCO-170RB-PW	
<b>Optional communication systems<sup>5)</sup></b>			
Ethernet interface (LAN)		MTR-L03-PW	
Digital interface (RS232C/RS485)		MTR-480-PW	

<sup>1)</sup> Exterior dimensions of main cabinet only, excluding handle and other external projections.

<sup>2)</sup> ±0.25°C; ambient temp 23°C - 25°C, setting 37°C, CO<sub>2</sub> 5%, no load

<sup>3)</sup> Nominal value

<sup>4)</sup> MCO-170AIC series requires MCO-170HB-PE, MCO-170EL-PW, MCO-HP-PW and SafeCell UV option for H<sub>2</sub>O<sub>2</sub> decontamination

<sup>5)</sup> MCO-170AIC series can only be fitted with one communications interface.

\* If stacking two incubators, make sure the double-stacking dedicated securing hardware and spacer are used.



# WolfLabs

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

**[www.wolflabs.co.uk](http://www.wolflabs.co.uk)**

**Tel : 01759 301142**

**Fax : 01759 301143**

**[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)**

Please contact us if this literature doesn't answer all your questions.