

PURITE

# Purite HP160-320

Compact water purification system,  
designed to guarantee a consistent  
supply of high quality pure water



The Purite HP160-320 is a compact unit designed to produce a consistent supply of > 10MΩ.cm water for HPLC, ion chromatography, atomic absorption, hydrogen generation, and clinical analyser feed.

## Additional features

- Guaranteed > 10MΩ.cm water quality
- Remote Dispense Pod (Optional)
- Energy saving intelligent stand-by mode
- Dispense rate of up to 2 litres/min
- Water quality parameters, MΩ.cm, °C, flowrate displayed
- Internal microfiltration
- UV LED disinfection incorporated within the dispense head
- ECO option now available offering 50% recovery which equates to a significant reduction in water usage and waste
- WiFi enabled for remote monitoring and operation.



# Purite HP160-320

Compact water purification system, designed to guarantee a consistent supply of high quality pure water


## Common Purite features

Our Purite range of water purification systems are compact, robust, simple to use, easy to maintain and available in six standard models: Analyst, HP, Purewater 300 Package, Fusion, HPA 30 and Neptune Ultimate.

Common features of all our Purite systems include:

- Space-saving, dependable, bench top or wall mounted systems
- RO Removes > 98% minerals and > 99% bacteria
- Choice of production rates up to 48 l/hr
- Optional external storage tanks up to 100 litres
- RO Boost pump fitted as standard
- Installation kit and all consumables included for first few months operation
- LCD colour touch screen panel
- Visual and audible alarms included
- Utilises carbon pre-treatment, RO and deionisation
- USB port to download event data and upload software updates
- Integral 20 litre storage as standard (excludes Neptune Ultimate)
- Semi-automatic clean cycle.

## Purite HP process flow

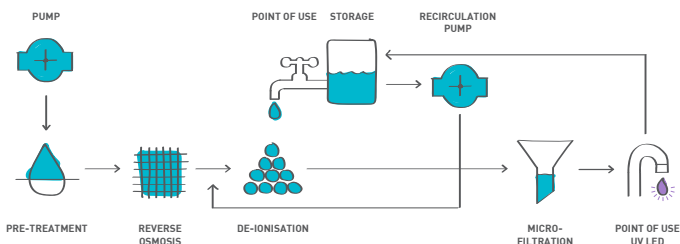

## Technical Specifications

Unit Specification	160	320
Width (mm)	440	
Depth (mm)	560	
Height (mm)	750	
Max shipping weight (kg)	36	41
Max working weight (kg)	51	59
Installation requirements		
Power	Single Phase, 110-230V, +/- 10%, 50/60 Hz	
Feed water	Potable	
Maximum TDS (ppm)	1000	
Minimum inlet pressure - psi (bar)	30 (2.1)	
Maximum inlet pressure - psi (bar)	90 (6.2)	
Feed water temperature	1-35°C	
Product outputs*		
@ 10°C (l/hr)	14.4	30
@ 25°C (l/hr)	24	48

\* Product outputs based on a feed water pressure of 4 bar

System Specification	
Pure water storage	20 litre storage tank as standard (External 50 & 100 litre tanks available)
Display panel	LCD – Colour touch screen
Pre-treatment cartridge	✓
Reverse osmosis	✓
Deionisation cartridge	✓
Internal filtration	Microfiltration
Point of use	UV / LED
UV lamp	✓*
Recirculation pump	✓
Ultrapure polishing cartridge	-

\* External tank version only

Treated Water Specification	High Purity Dispense	Purified Water Storage Tank
Inorganics	> 10MΩ.cm	
pH <sup>†</sup>	Neutral	
Bacteria	< 1cfu/ml	
Organics – TOC (ppb)	< 20	
Particles	0.005µm	
Endotoxins	-	
DNases	-	
RNases	-	
Dispense modes	Latched - hold	
Dispense flow rate	up to 2.0 l/min	

\* pH of stored water may decrease due to absorption of free carbon dioxide

**PURITE**



# WolfLabs

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

**[www.wolflabs.co.uk](http://www.wolflabs.co.uk)**

**Tel : 01759 301142**

**Fax : 01759 301143**

**[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)**

Please contact us if this literature doesn't answer all your questions.