

SCHOTT
glass made of ideas

KL Series

Fiber optic illumination
for stereo microscopy

Eco

2800 K

0

100

KL 1500 HAL

SCHOTT

SCHOTT is a leading international technology group in the areas of specialty glass and glass-ceramics. With more than 130 years of outstanding development, materials and technology expertise we offer a broad portfolio of high-quality products and intelligent solutions that contribute to our customers' success.

Light is a key element in stereo microscopy. By using the correct illumination it can make hidden details visible and enhance the contrast of the objects to distinguish the feature of interest. A wide variety of tasks from life science to industrial applications require very different illumination techniques. SCHOTT is able to offer the full range of fiber optic and LED lighting products with an extensive range of accessories to meet your specific needs.



Contents

4	KL 300 LED – Compact LED light source	10	System diagrams
6	KL 1600 LED – Standard LED light source	13	At a glance
7	KL 2500 LED – Advanced LED light source	14	Accessories
8	KL 1500 HAL – Halogen light source	15	Puravis® glass optical fibers



KL 300 LED

Compact LED light source for fiber optics

The KL 300 LED offers simple operation combined with excellent value for money. It is an innovative fiber optic light source that uses cold light to illuminate all types of objects in life science and industrial applications.

Employing state of the art technology, SCHOTT has developed and designed a single LED driven light source to provide an attractive alternative to conventional halogen cold light sources.

The brightness is equivalent to a 30-watt halogen lamp and therefore ideal as a standard illumination system for the requirements of routine inspections and education.

Due to its smart design, the KL 300 LED can be mounted to any microscope stand or column. The dimming control is ergonomically placed to the focus control of the microscope. As the chosen LED has a long lifetime of at least 50,000 hours it is maintenance free for the user and avoids service and downtime costs. The ripple free illumination is perfect for digital imaging applications. The color temperature of 5,600 K of the emitted neutral white light does not change when the light source is dimmed.

The KL 300 LED combines all advantages of LED light with the illumination through fiber optics: All types of light guides in the KL 200 series can be connected to the KL 300 LED. This allows full flexibility to realize all common illumination techniques.

Like all KL light sources the KL 300 LED is designed for a wide range of power supply (100-240 V; 50-60 Hz). It has been approved and certified as laboratory equipment and is in compliance with the CE regulations.

Features

- 80 lm lightflux
- No fan, silent operation
- Compact ergonomical design
- Mountable direct to the stand or column
- Wide range power supply with international clip plug system

The KL product line offers modular fiber optic illumination for stereo microscopy so that is always matches to the desired application. Therefore the SCHOTT KL product line is not just an accessory but a professional illumination system for even specialized tasks.



KL 1600 LED

Standard LED light source for fiber optics

The KL 1600 LED is an innovative fiber optic light source which uses cold light to illuminate all types of objects in industrial and life science applications. SCHOTT has developed and designed a multiple LED driven light source to provide an attractive alternative to conventional halogen cold light sources. The brightness is equivalent to a 150-watt halogen lamp and therefore ideal as a powerful illumination system for the requirements of all modern stereo microscopes.

Due to its slim design, the KL 1600 LED can be placed close to microscope stand or pillar. The dimming control is than ergonomically placed to the microscope. As the chosen LEDs have a long lifetime of at least 50,000 hours it is maintenance free for the user and avoids service and downtime costs. The ripple free illumination is perfect for digital imaging applications and the color temperature of 5,600 K of the emitted neutral white light does not change when the light source is dimmend.

The KL 1600 LED combines all advantages of LED light with illumination through fiber optics: All different types of light guides of the KL 1500 series can be connected to the KL 1600 LED. This allows the full flexibility to realize all common illumination techniques.

Like all KL light sources the KL 1600 LED is designed for a wide range of power supply (100-240 V; 50-60 Hz). It has been approved and certified as laboratory equipment and is in compliance with the CE regulations.

Features

- 680 lm lightflux
- Slim ergonomical design
- Continuous dimming
- Filter slider
- Wide range power supply





KL 2500 LED

Advanced LED light source for fiber optics

The KL 2500 LED is an innovative fiber optic light source which uses cold light to illuminate all types of objects in industrial and life science applications. The brightness is equivalent to a 250-watt halogen lamp and therefore ideal as a powerful illumination system for the requirements of state of the art high end stereo microscopes.

The extra fine dimming and display fits to the highest optical magnifications and far advanced applications. As the chosen LEDs have a long lifetime of at least 50,000 hours it is maintenance free for the user and avoids service and downtime costs.

The ripple free illumination is perfect for digital imaging applications and the color temperature of 5,600 K of the emitted neutral white light does not change when the light source is dimmed. In addition all features can be externally controlled via USB from the microscope software.

The KL 2500 LED combines all advantages of LED light with the advantages of illumination through fiber optics: All different types of light guides of the KL 1500 series can be connected to the KL 2500 LED. It enables the full flexibility to realize all common illumination techniques. Like all KL light sources the KL 2500 LED is designed for a wide range of power supply (100-240 V; 50-60 Hz). It has been approved and certified as laboratory equipment and is in compliance with the CE regulations.

Features

- 1100 lm lightflux
- Slim ergonomical design
- Extra fine dimming
- Filter slider
- LCD Display
- Controllable via USB
- Wide range power supply

KL 1500 HAL

Professional halogen light source for fiber optics

SCHOTT has developed and designed a light source with the full 150 Watt halogen spectrum CRI 100 offering the best performance when it comes to color critical measurements in life science and industrial applications.

With the classic design the KL 1500 HAL can replace all SCHOTT halogen light sources of the last decades. A switchable optic ensures uniform, high intensity illumination even when using light guides with a small diameter.

An ultra low noise fan and an optimized airflow facilitate relaxed working conditions. The LCD display with various parameters enables comfortable operations control and reproducible results. The ripple free illumination is perfect for digital imaging applications.

The KL 1500 HAL combines all features with the advantages of illumination through fiber optics: All different types of light guides of the KL 1500 series can be connected to the KL 1500 HAL. This allows the full flexibility to realize all common illumination techniques.

Like all KL light sources the KL 1500 HAL is designed for a wide range of power supply (100-240 V; 50-60 Hz). It has been approved and certified as laboratory equipment and is in compliance with the CE regulations.

Features


- 600 lm lightflux
- Switchable optic
- Sensor interlock at the light guide socket
- Ultra low noise fan
- LCD Display





System diagram



KL 1600 LED | KL 2500 LED | KL 1500 HAL

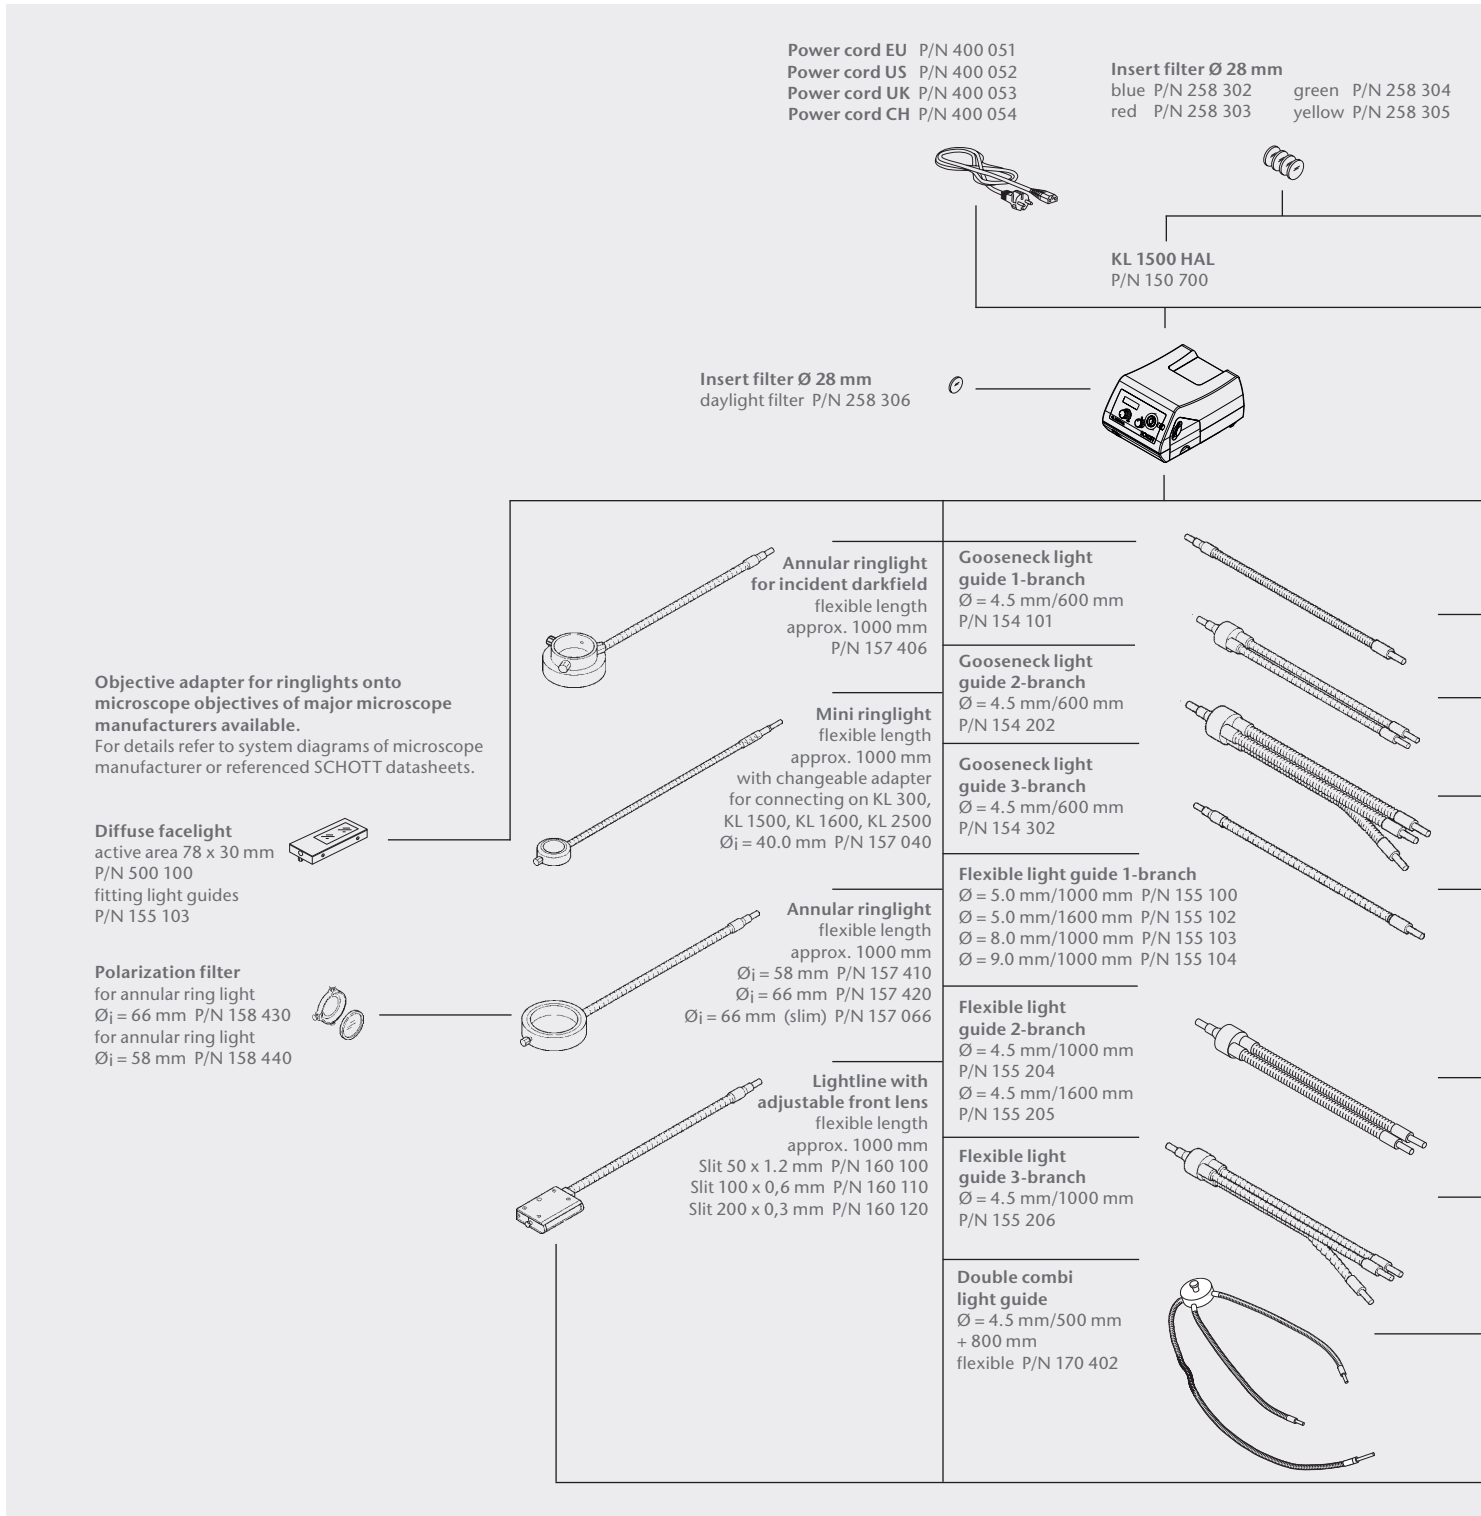

KL 1600 LED
P/N 150 600

KL 2500 LED
P/N 250 400

Insert filter Ø 28 mm
halogen P/N 258 307



Insert filter Ø 28 mm for
fluorescence excitation
blue $\lambda = 484 \text{ nm}$ P/N 258 313
green $\lambda = 515 \text{ nm}$ P/N 258 314



Focusing lens and filter
set for light guides
up to $\text{Ø} = 5 \text{ mm}$; blue, red,
green, yellow P/N 158 200

Polarization filter
for focusing lens
P/N 158 205

Daylight filter
for focusing lens
P/N 158 211

Halogen filter
for focusing lens
P/N 158 207

Focusing lens for light guides
up to $\text{Ø} = 5 \text{ mm}$ P/N 158 210

Holder for focusing lens
P/N 158 341



Articulating arm
with 2 x M6
connecting threads
P/N 158 345



Holder with M6 thread
P/N 157 430
for annular ringlight
 $\text{Ø}_i = 58 \text{ mm}$, $\text{Ø}_j = 66 \text{ mm}$



Transmitted light stage
 $\text{Ø} 84 \text{ mm}$, for flexible light
guide up to $\text{Ø} 5 \text{ mm}$
P/N 122 150



Polarizing filter
attachment for TL
P/N 158 500



Base for articulating arm
with 3 x M6 connecting threads
P/N 158 340




Holder with M6 thread
for flexible light guide
with 3 x M6 connecting threads
up to $\text{Ø} = 5 \text{ mm}$ P/N 158 330
for flexible light guide
 $\text{Ø} = 8 \text{ mm} + 9 \text{ mm}$
P/N 158 335



Polarization filter for
focusing lens, twistable
for light guides
 $\text{Ø} = 8 \text{ mm} + 9 \text{ mm}$
P/N 158 206




Focusing lens without filter
for light guides
 $\text{Ø} = 8 \text{ mm} + 9 \text{ mm}$
P/N 158 215



Adapter for combi
light guide
 $\text{Ø} 32 \text{ mm}$ column
P/N 158 402

System diagram

KL 300 LED

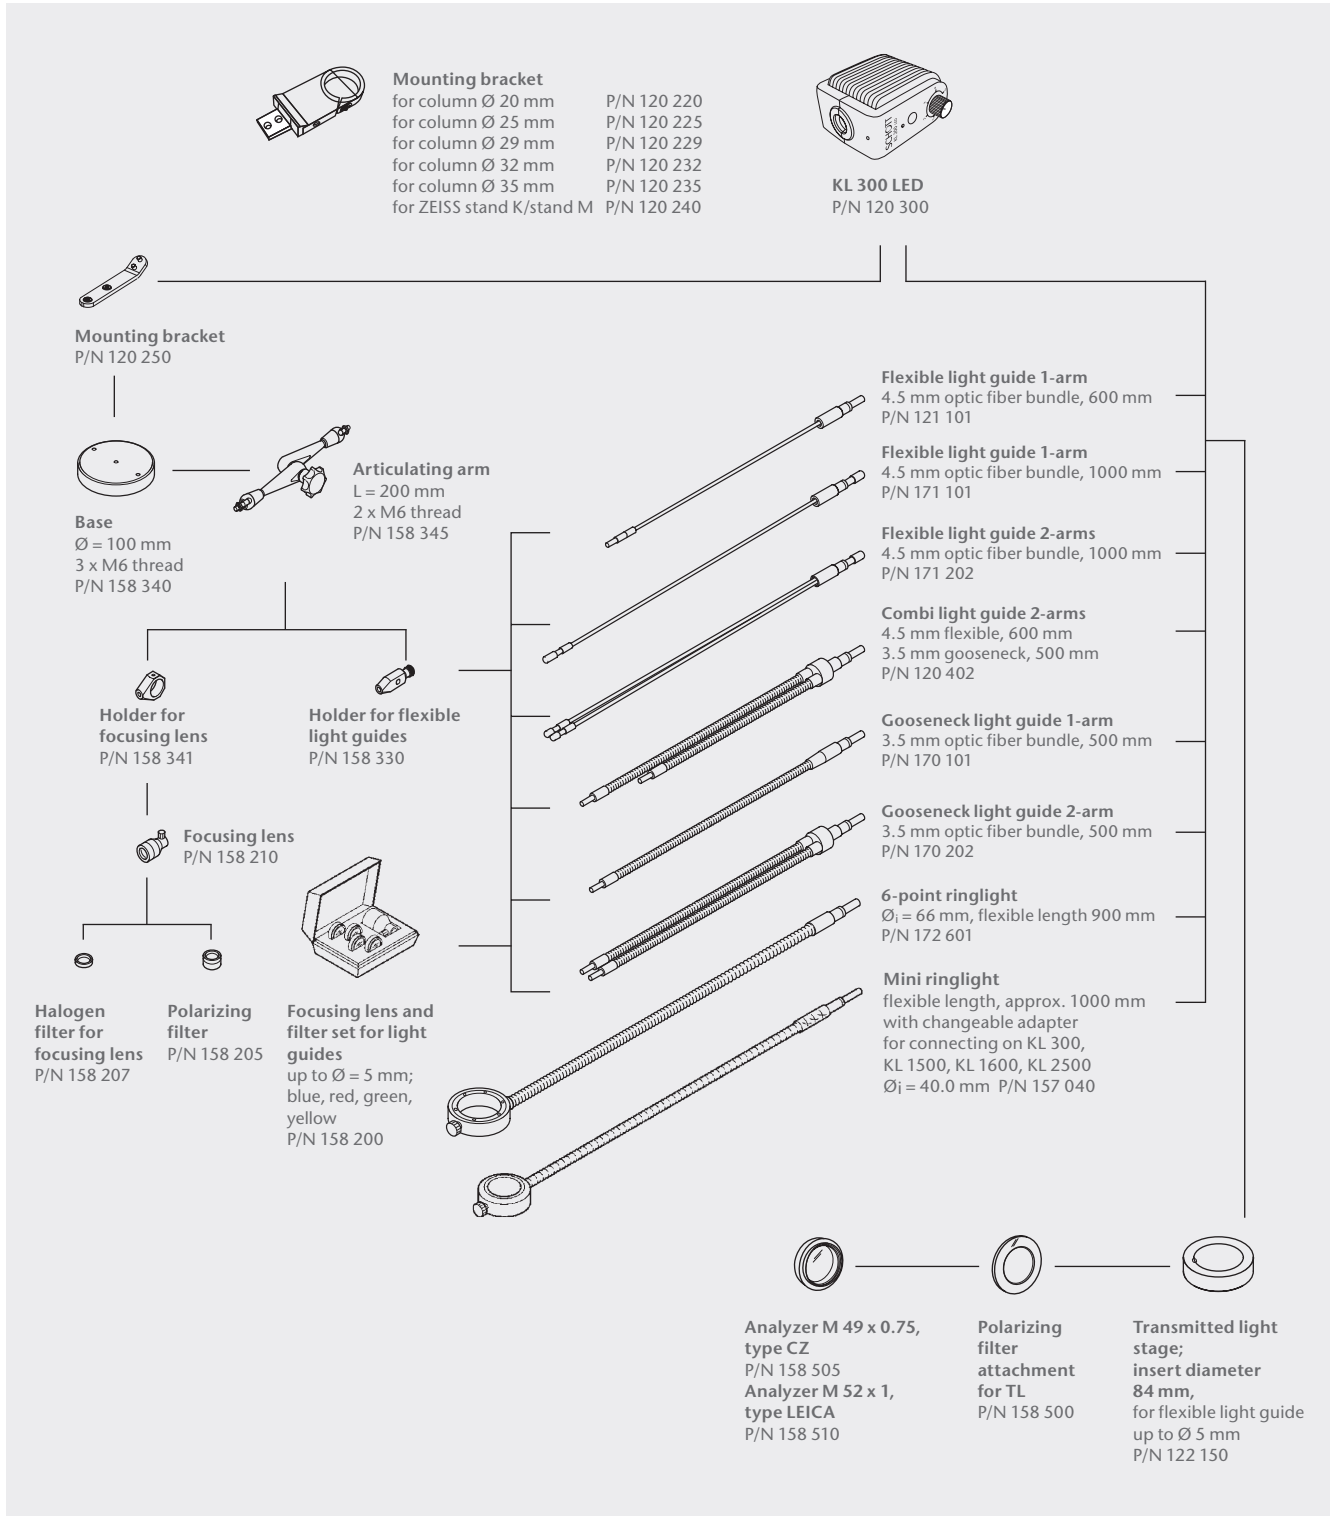

KL light sources at a glance

Feature	KL 300 LED	KL 1600 LED	KL 2500 LED	KL 1500 HAL
Lamp type	LED	LED	LED	HAL
Lightflux (lm)	80	680	1100	600
Max. active light guide Ø (mm)	6	9	9	9
Wide range power supply	●	●	●	●
Continuous dimming	●	●	●	●
Extra fine dimming			●	
LCD display			●	●
Filter slider		●	●	●
Fan cooling		●	●	●
USB port			●	
Lamp replaceable by user				●

Accessories



- 1 | Gooseneck 2-arms
- 2 | Annular Ringlight "slim"
- 3 | Lightlines
- 4 | Base Stand
- 5 | Holder
- 6 | Flexible light guide 1-arm
- 7 | Flexible light guide 3-arm
- 8 | Focussing lens and filter set

Choose from our extensive range of light guides and accessories.
These are only some examples.



Puravis® eco-friendly glass optical fibers

The heart of all fiber optic light guides

In all its microscopy light guides, SCHOTT uses the new environmentally friendly glass optical fibers PURAVIS®. Not just the fibers themselves, but also the entire proprietary manufacturing process are lead free and avoid the use of arsenic and antimony. Due to superior physical and chemical properties, the new PURAVIS® glass optical fibers provide a high performance, superior longevity, improved transmission in the near UV and outstanding transmission of white light.

This new milestone in the development of environmentally friendly technologies will not only benefit the environment, but also our customers.

Improved Properties

- Environmentally friendly
- Superior optical performance
- Long-term stability



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.