Verderflex Vantage 3000 C S10



Verderflex Vantage 3000 C S10 Specification				
Pump head	Polyoxymethylene (POM) and Aluminium, Powder Coated with Polymethylmethacrylate (PMMA) Front Cover			
Control Options	Analogue Inputs (0-10V DC / 4 to 20mA), Potentiometer (10k Ω), Remote Stop / Start / Reverse (Footswitch)			
Software Features	Keypad Lock, Memory Dose			
Display	2 Line Alphanumeric Display			
Motor	24 Hour Duty Brushless DC			
Rotor	Polyoxymethylene with Stainless Steel Rollers			
Power Supply	85 - 265V AC 50/60Hz with Fuseless Resetable Switch			
Speed	10 to 250 RPM			
Protection Class	IP66			
Standard Tube	Verderprene, Silicone			
Tube Sizes	3.2 x 2.4mm, 4.8 x 2.4mm, 6.4 x 2.4mm, 8.0 x 2.4mm			
Weight	5.5 kg			
Number of Heads	Single Head Standard, Two to Special Order			

Flow Rates


Tube (ID x WT)	RPM	Flow ml/min	Flow I/hr
3.2 x 2.4 mm	10	20	1.2
3.2 x 2.4 mm	120	240	14.4
3.2 x 2.4 mm	200	390	23.4
3.2 x 2.4 mm	250	469	28.1
4.8 x 2.4 mm	10	25	1.5
4.8 x 2.4 mm	120	370	22.2
4.8 x 2.4 mm	200	580	34.8
4.8 x 2.4 mm	250	729	43.8
6.4 x 2.4 mm	10	50	2.7
6.4 x 2.4 mm	120	500	32.4
6.4 x 2.4 mm	200	900	53.4
6.4 x 2.4 mm	250	1000	65.6
8.0 x 2.4 mm	10	80	4.8
8.0 x 2.4 mm	120	900	52.8
8.0 x 2.4 mm	200	1500	88.8
8.0 x 2.4 mm	250	1780	106.8


Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure and normal component production tolerances.




Verderflex Vantage 3000 C S10











All dimensions are in mm.
All dimensions and weights are for guidance only.

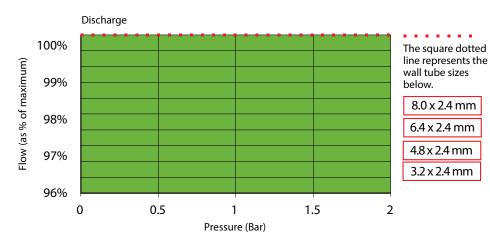

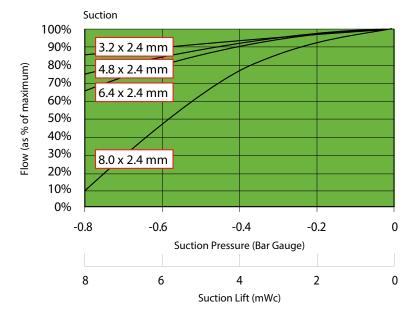







Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.