

# KERN IFC 30K-3

The new IFC: Robust industrial scales with up to three interfaces



## Approval

CE mark	✓
---------	---

## Display

Display type	LCD
Display type	LCD with backlight
Display screen size	160×60 mm
Display backlight	✓
Display digit height	48 mm
Languages of the user interface	English Symbol language

## Construction

Dimension display device (W×D×H)	220×145×65 mm
Dimensions weighing platform (W×D×H)	400×300×117 mm
Material display housing	Plastics
Material weighing plate	stainless steel
Material platform	steel, powder-coated
Dimensions weighing surface (W×D)	400×300 mm
Display device cable length	3 m
Allowed cable length display device [Max]	3 m
Transport safety lock - bolt torque	0,1 Nm
Material load cell(s)	aluminium
Load cells - number	1
Levelling feet adjustable	✓
Wall mount	✓
Stand rotatable	no
Stand inclinable	no

## Functions

Number of keys for operation	7
Auto-off interval(s) in mains power mode	off
	5 min
	2 min
Auto-off interval(s) in battery mode/rechargeable battery mode	1 min
	30 min
	60 min
	30 sec
Capacity - Display	✓
PreTare function	✓
Tare function	manual (multi)
Hold function	✓
Percentage determination	✓
Counting function	✓

## Category

Brand	KERN
Product category	Industrial scale
Product group	Platform scale
Product family	IFC

## Measuring System

Construction type of the scale	Single-range balance
Number of weighing ranges	1
Weighing system	Strain gauge
Weighing capacity [Max]	30 kg
Readability [d]	0,001 kg
Resolution	30.000
Linearity	± 0,004 kg
Reproducibility	0,001 kg
Default unit	kg

Units	kg
	g
	lb
	ffa
	PCS
	%

Adjustment options	Adjusting with external weight
Recommended adjusting weight	30 kg (M1)
Stabilization time	3 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,005 kg
Maximum creep (15 minutes)	4 g
Maximum creep (30 minutes)	8 g
Loadcell type	aluminium IP65 silicone-coated
Load cell connection	4-wire

# KERN IFC 30K-3



The new IFC: Robust industrial scales with up to three interfaces

Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Sum A
Sum memory function	✓
Alibi memory	optional internal memory
Alibi memory - number of memory spaces	250.000
Interfaces	RS-232 (optional) Ethernet (optional) Alibi memory (optional, factory) analogue (0 - 10 V) (optional) analogue (4 - 20 mA) (optional) Bluetooth BLE (v4.0) (optional) USB-Device (optional) KUP WiFi (optional)
IP protection - complete device	-
IP protection - display	no IP protection
IP protection - load cell	IP65
IP protection - platform	no IP protection

## Counting

Smallest piece weight when piece counting - laboratory conditions	1 g
Smallest piece weight when piece counting - normal conditions	10 g
Counting reference weight can be entered	✓
Reference quantity	5, 10, 20, 50, n (any number of pieces)
Counting resolution (laboratory conditions)	30.000

## Power Supply

Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	5,9V, 1A
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH

Plug-in power supply / adapter for countries - optional	EURO UK US CH
Rechargeable battery optional	Rchrg. battery optional - intern
Rechargeable battery charging time	8 h
Rechargeable battery operating time - backlight on	20 h
Rechargeable battery operating time - backlight off	48 h
Battery	3 V CR2032
Battery / accumulator type	Li-Ion
Battery capacity	220 mAh
Battery voltage	3 V

## Environmental conditions

Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C

## Packing & Shipping

Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	466×794×228 mm
Net weight	7,5 kg
Shipping method	Parcel service
Net weight approx.	8 kg
Gross weight approx.	9 kg
Shipping weight	16,9 kg

## Services (optional)

Article number for adjustment at the location of installation	961-248
Article number for DAkKS calibration	963-128
Article number for certificate of conformity (verification)	969-517


# KERN IFC 30K-3



The new IFC: Robust industrial scales with up to three interfaces

## Pictograms

### STANDARD

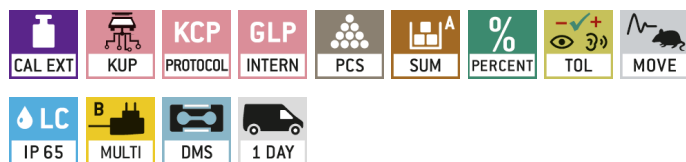

### OPTION





# WolfLabs

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

**[www.wolflabs.co.uk](http://www.wolflabs.co.uk)**

**Tel : 01759 301142**

**Fax : 01759 301143**

**[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)**

Please contact us if this literature doesn't answer all your questions.